

**LED Downlight
600VDC Input**

SPECIFICATIONS

Housing: Extruded aluminum 0.125" thick low-profile housing

LED: Edge lit light source 4000K CCT, >50,000hours

Lens: .187" THK cast polycarbonate with nano antistatic coating

Electrical: 600VDC driver with charging indicator and magnetic test switch

Battery Pack: 4-Hour 48V 1.1A NiMH self-diagnosing battery

Operating Range: -20° to 130°

Component Cover: 1/16" thick aluminum

Vandal Cover: 3/16" thick extruded aluminum

Safety Cable: Heavy gauge aircraft cable

Hardware: Tamper resistant T15 center pin, SS


Fuse: In-line

Connections: Quick-connect


Listings & Certifications: UL listed, IP65, IK10

5 Year Warranty • Made in USA

MOUNTING BRACKET

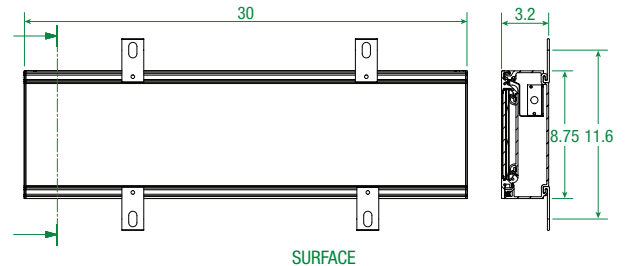


SURFACE

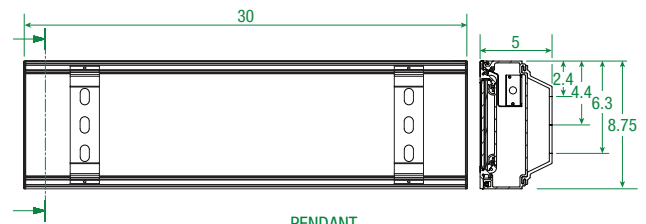

PENDANT

PHOTOMETRICS

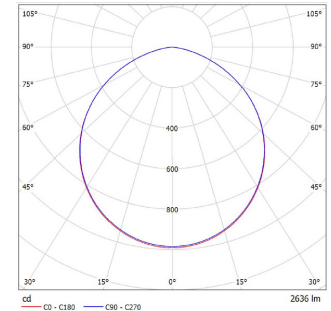

PROJECT INFORMATION

Date _____

Fixture Type _____

Project Name _____

Catalog Number _____

Approved By _____

ORDERING INFORMATION

SERIES	TYPE	COLOR TEMP	LENGTH	PAINT COLOR	LUMEN OUTPUT	POWER INPUTS	MOUNTING
SL	3923-79	35=3,500K 40=4,000K 50=5,000K	2.5 2.5=2.5'	01=Light Grey 02=Argento 03=Jet Black 06=Platinum	2300 2300= 2,300lm	600 600= 600VDC	S=Surface P=Pendant