

Hybrid EM (120VAC with battery pack and 600VDC) vandal resistant LED light fixture

SPECIFICATIONS

Housing: Extruded aluminum 0.125" thick low-profile housing

Optics: LED Light Source, >50,000hours

Lens: .187" THK cast polycarbonate with nano antistatic coating

Electrical: Hybrid, 120VAC & 600VDC drivers with charging indicator and magnetic test switch

Battery: 4-Hour 48V 1.1A NiMH self-diagnosing battery

Operating Range: -20° to 130° F

Component Cover: 1/16" thick aluminum

Vandal Cover: 3/16" thick extruded aluminum

Safety Cable: Heavy-gauge aircraft cable

Hardware: Tamper resistant T15 center pin, SS


Fuse: In-line

Connections: Quick-connect


Listings & Certifications: ETL listed, IK10

5 Year Warranty • Made in USA

MOUNTING BRACKET

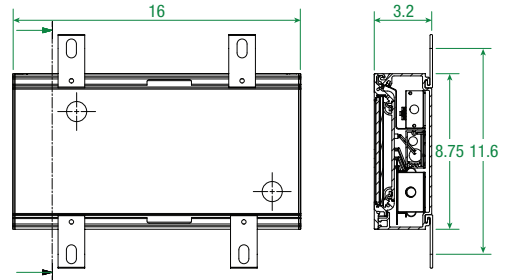


SURFACE

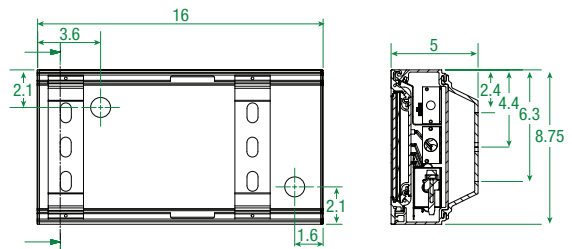

PENDANT

PHOTOMETRICS

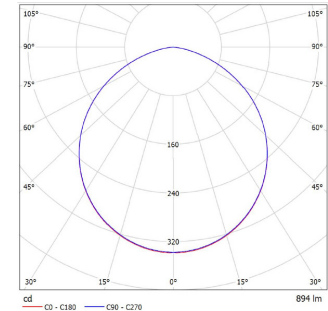

PROJECT INFORMATION

Date _____

Fixture Type _____

Project Name _____

Catalog Number _____

Approved By _____

ORDERING INFORMATION

SERIES	TYPE	COLOR TEMP	LENGTH	PAINT COLOR	LUMEN OUTPUT	POWER INPUTS	MOUNTING
SL	4095	35=3,500K 40=4,000K 50=5,000K	16=16"	01=Light Grey 02=Argento 03=Jet Black 06=Platinum	900=900lm	HY=Hybrid: 120VAC & 600VDC N=Normal: 120VAC only	S=Surface P=Pendant