



2-lamp LED Tube Corner Mounted Downlight with T8 retrofit tubes, pendant or surface mounted with vandal resistant lens

SPECIFICATIONS

Housing: Extruded aluminum 1/8" thick low-profile housing

Lens: 0.38" THK Cast Polycarbonate, Clear

Lumen Output: 4' tube – 2,700 Lumens.

Electrical: Universal 90-277VAC

Operating Range: -25° to 50°

Listings & Certifications: UL Listed, Wet location, IP65, & IK10 rated with lens.

Features: Integral splice compartment.

Reflector: 1/8" Extruded Aluminum, 94% Reflectance

Socket Saddle: 1/8" Aluminum, baked gloss white finish.

Cable Hinged Vandal Lens: 0.38" Thick flat clear polycarbonate – Gasketed.

Socket: Single pin stationary one end, single pin telescopic other end.

Compartment Divider: 1/8" Thick aluminum.

Housing End Plate: 3/8" Thick machined aluminum, finish to match housing – Gasketed.

Lamp: (2) LED Tube light sources with integral high efficiency drivers, >50,000 hours.

Screws: #8-32 (T15) Flat head S.S. tamper-resistant countersunk and captive.


Clevis Hanger: 3/16" Thick aluminum, finish to match housing. Corner, (2) 1/4-20 x 1" set screw. Minimum (4) per unit.

Lamp Clip: (1) per lamp.


Fuse: In-line.

5 Year Warranty • Made in USA

MOUNTING PATTERN

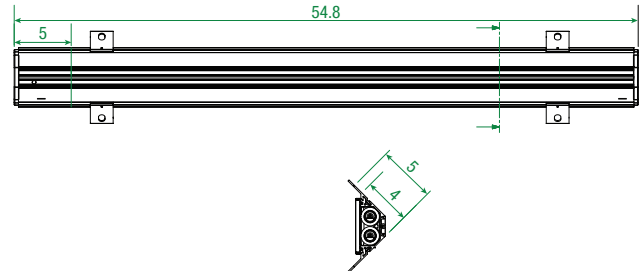

PHOTOMETRICS



PROJECT INFORMATION

Date _____

Fixture Type _____

Project Name _____

Catalog Number _____

Approved By _____

ORDERING INFORMATION

SERIES	TYPE	COLOR TEMP	LENGTH	PAINT COLOR	POWER INPUTS	MOUNTING	OPTIONS
SL	4098-2	35=3,500K 40=4,000K 50=5,000K	4=4'	01=Light Grey 02=Argent 03=Jet Black 06=Platinum	UV UV=Universal (90-277 VAC)	C C=Corner	V V=Vandal & Sealed